


SPEED CUSHIONS

Speed Cushions are raised devices placed across the road to slow traffic. This design over a 7, 10.5, 14 or 21 foot length of space encourages cars to slow down without coming to a halt. They are ideal for residential, commercial, industrial, etc., roads. Speed Cushions should ideally be installed in a series to create an ongoing traffic calming area.

At 14' Long has a designed speed between 20-25 mph +/- 5 mph.

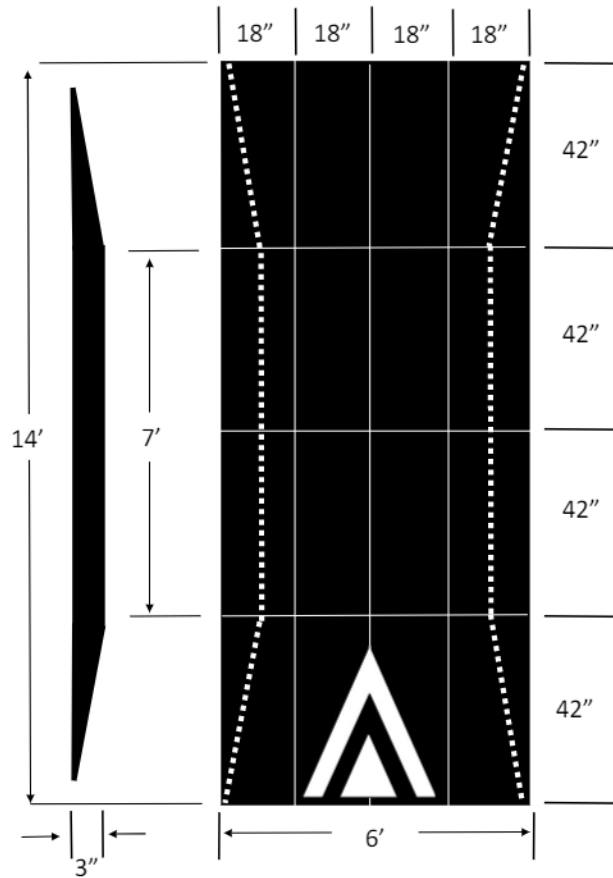

**As Shown: 14' L x 6' W x 3" H
with ITE approved White MUTCD**


Part Number: SC-140603-M

- SC-140603-M Consists of**
- 2 ea. LSH03-B *
 - 2 ea. RSH03-B *
 - 2 ea. LSH33-B *
 - 2 ea. RSH33-B *
 - 2 ea. MSH03-B *
 - 1 ea. MSH03-MLT-W *
 - 1 ea. MSH03-MRT-W *
 - 4 ea. MSH33-B
 - 100 ea. Bolts, Anchors, Washers
 - 6 Tubes Anchor Adhesive
- * **Must apply** anchor adhesive

7" Hardware is standard for asphalt installation.
Request 4" hardware if installing into concrete or will remove product during winter snow months.



- ◊ All modules have patented interlocking tongue and grooves.
- ◊ Creates a bond among modules.
- ◊ Increases installed cushion vehicle impact resistance.
- ◊ Enhances long-term stability and product performance.



PRODUCT SPECIFICATIONS



Material Physical Properties

Material: Compression molded 100% recycled synthetic and natural rubber composite and binder. Contains no dust, crumbs or fly that will weaken modules

Tensile Strength: 500 psi minimum

Shore Hardness: 70 Shore A minimum

Specific Gravity: 1.1

Deformation Rate: None; 100% recovery

Skid Resistance: 89 (Dry)

Markings: All markings embedded into rubber during manufacturing process. All have reflective qualities.

Inherent Resistance: Impermeable to engine oils, road salts, transmission fluid, anti-freeze, gasoline/diesel fuel, solvents, etc. Unchanged by outdoor exposure including extreme weather conditions. Conforms to pavement deviations.

Aspects of Patented Modules

Width: 18" (+/- 1/16") With Dual Tongue & Grooves

Length: 42" (+/- 1/8") With Dual Tongue & Grooves

Height: 3" (+/- 1/8") With Dual Tongue & Grooves

Entrance and exit module gradient: 1:15 Lip: .25"

Side module gradient: 1:5 Lip: .25"

Speed Cushions, Humps, Tables

Widths and lengths are adjustable

Width: From 3' and up by (18") 1.5' increments

Length: From 7' and up by (42") 3.5' increments

Standard Product Lengths 7', 10.5', 14', 17.5', 21'